Hidro
Pnevmo
Tehnika
3,Vojeli St.,Kazanlak , Bulgaria
Tel.: +359 431/ 62 228, 68 440
e-mail : info@hpt-bg.com
www.hpt-bg.com

HYDRAULIC DIRECTIONAL CONTROL VALVES WITH AUTOMATIC SWITCHING

4/2 RHA10/20A.



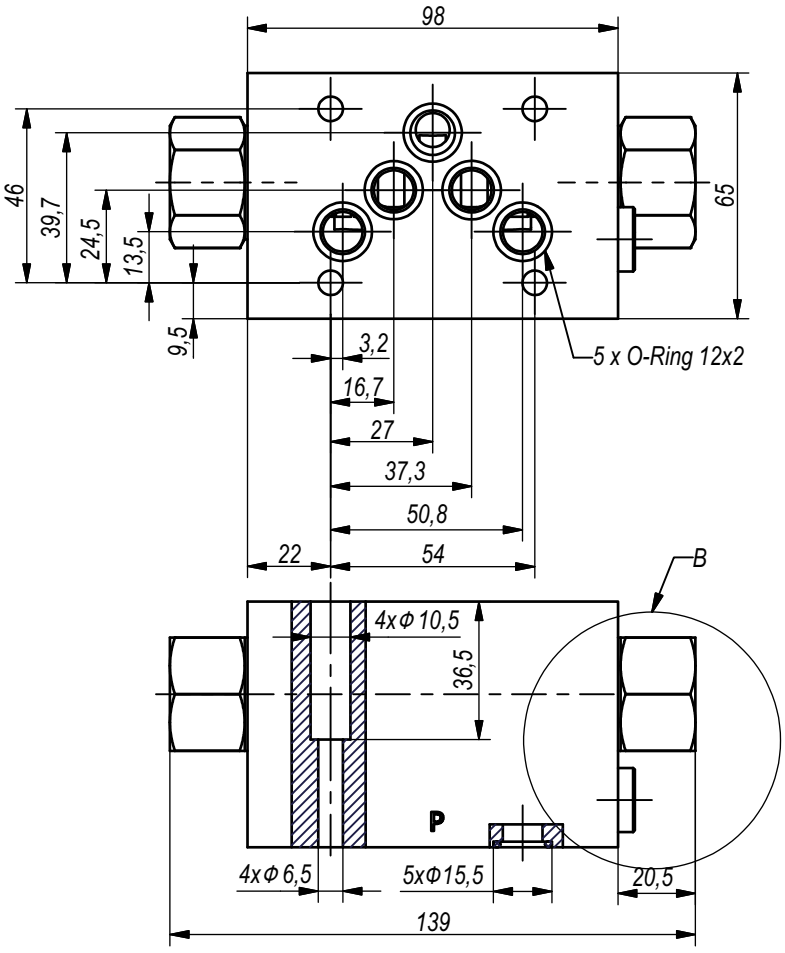

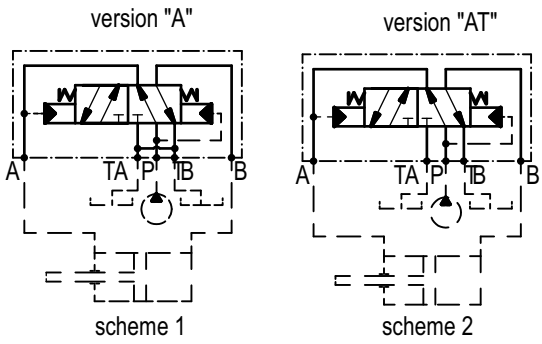



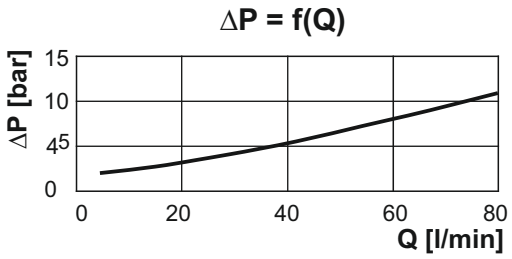

B
version "A"; "AT"



B
version "AM"



TECHNICAL DATA		
General		
Ambient temperature	°C	-20...+50
Hydraulic		
Working pressure	bar	20...200
Flow rate	L/min	3...80
Working fluid - mineral oil		
- viscosity	mm^2/s	10...100
- filtration level	μm	25 or better
- temperature	°C	-20...+80

Note:
1. All performances and calibration are carried out by using hydraulic oil with viscosity approx 46 cSt at 50 °C.
2. Mounting plate:
- acc. to ISO 4401-AB-05-4A (CETOP5)
3. Tightening torque of the connecting screws on the mounting plate - 14 N.m.

ORDERING CODE

4/2 RHA10 / 20 A

Type	Working pressure - code: **50...200 bar - 20**	Version - code: **A - see scheme 1** **AT - see scheme 2** **AM - see scheme 3**