






**Hidro
Pnevmo
Tehnika**

3, Vojeli St., Kazanlak, Bulgaria
Tel.: +359 431/ 62 228, 68 440
e-mail : info@hpt-bg.com
www.hpt-bg.com

VALVE BLOCKS

BV39A

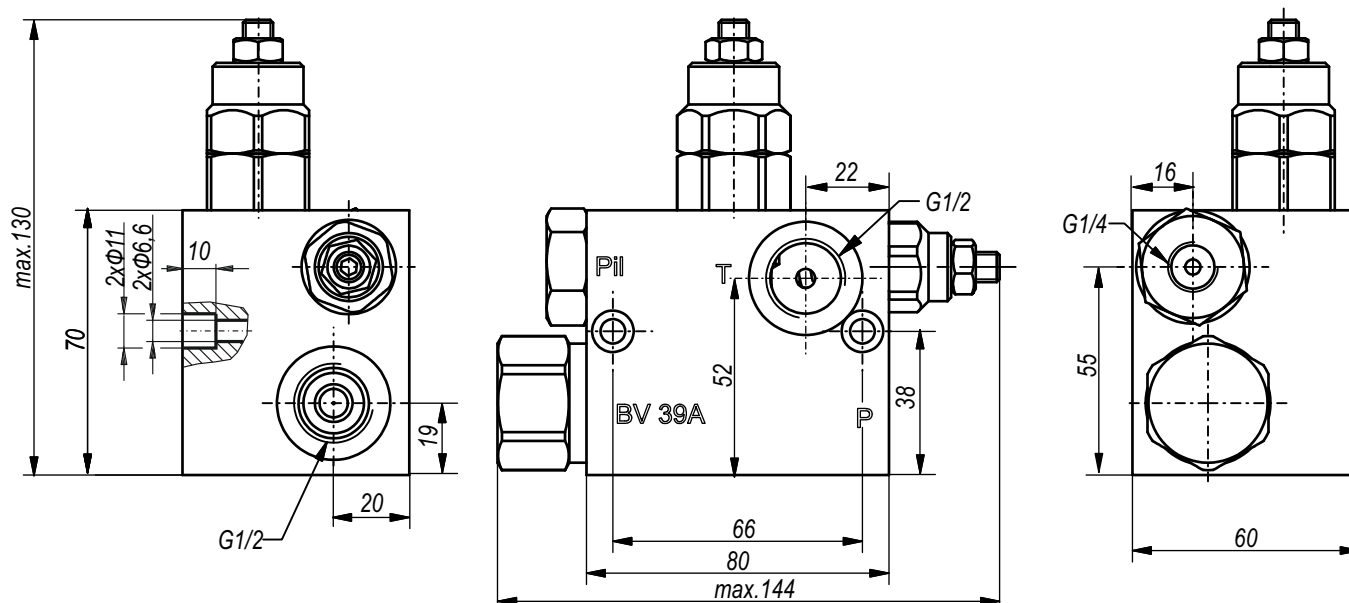

TECHNICAL DATA		
	Measurement unit	Value
Adj. pressure range relief valve	bar	30...250
Standard setting relief valve	bar	160
Setting pilot valve	bar	40
Max. flow through main valve	L/min	160
Max. flow through relief valve	L/min	80

All performances and calibration are carried out by using hydraulic oil with viscosity approx. 46 cSt at 50°C
Temperature range: -20...+80°C
Filtration absolute: 25 µm

ORDERING CODE

BV39A

Type