




**Hidro
Pnevmo
Tehnika**


3, Vojeli St., Kazanlak, Bulgaria
Tel.: +359 431/ 62 228, 68 440
e-mail: info@hpt-bg.com
www.hpt-bg.com

CHECK VALVES cartridge type

CV13- ..

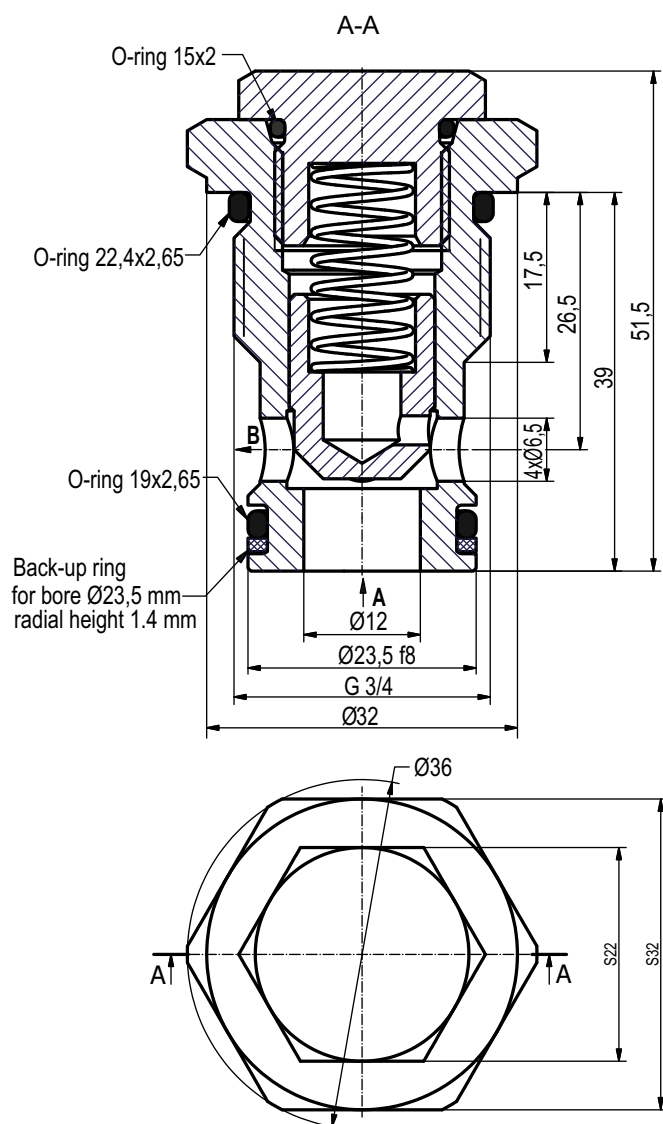

An opening for building-in
of check valve CV13

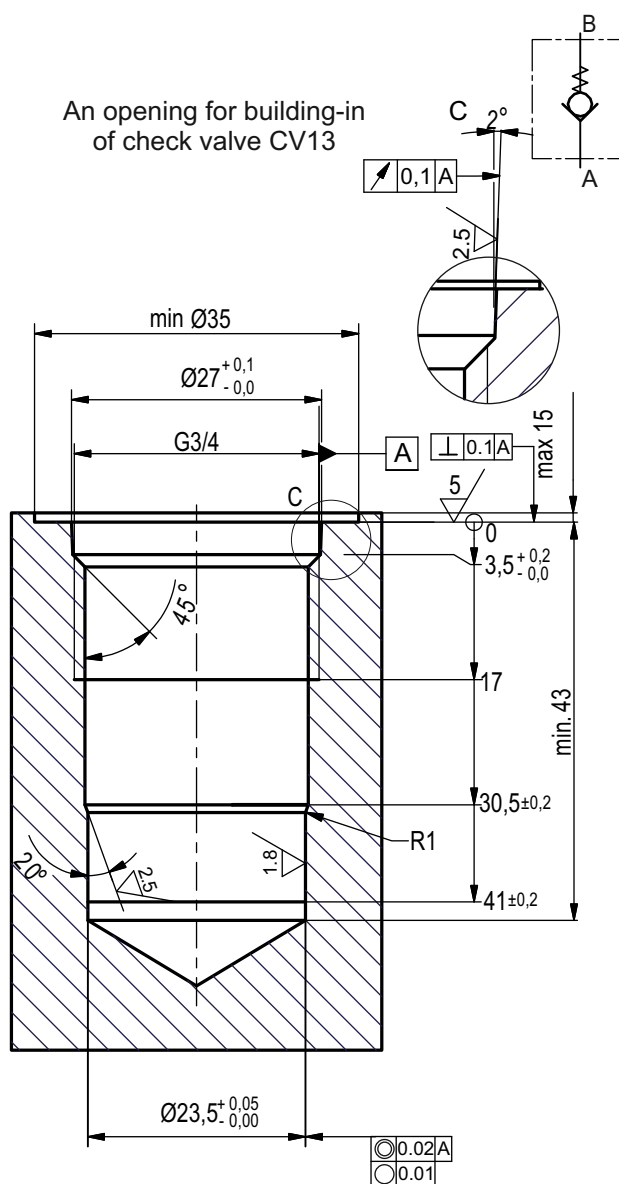

Type	Q _{nom.}	P _{max.}	Opening pressure of the check valve	Tightening torque
	L/min	bar	bar	Nm
CV13	40	200	0.5	45
CV13-1.5			1.5	

All performances and calibration are
carried out by using hydraulic oil with
viscosity approx. 46 cSt at 50 °C
Temperature range: -20°C...+80°C
Filtration absolute: 63 µm

ORDERING CODE

CV13-1.5

Type

Opening pressure - code:
0.5 bar - Omit
1.5 bar - 1.5