





**Hidro
Pnevmo
Tehnika**


3, Vojeli St., Kazanlak, Bulgaria
Tel.: +359 431/ 62 228, 68 440
e-mail: info@hpt-bg.com
www.hpt-bg.com

CHECK VALVES cartridge type

CV20- ..

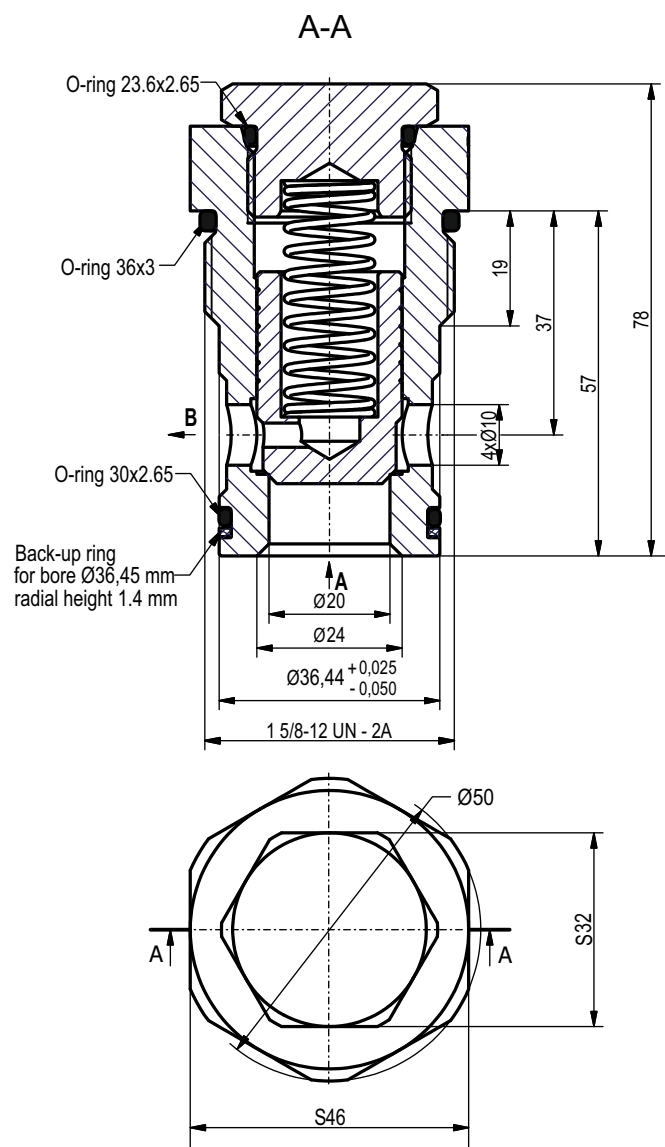

An opening for building-in
of check valve CV20

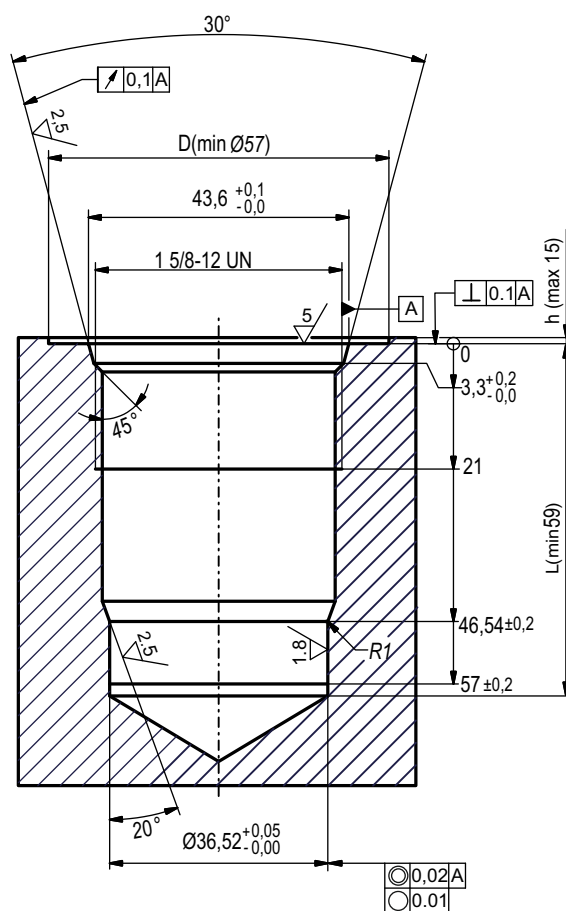

Type	Q _{nom.}	P _{max.}	Opening pressure of the check valve	Tightening torque
	L/min	bar	bar	Nm
CV20-0.3	240	250	0.3	110
CV20-4.5			4.5	

All performances and calibration are
carried out by using hydraulic oil with
viscosity approx. 46 cSt at 50 °C
Temperature range: -20°C...+80°C
Filtration absolute: 63 µm

ORDERING CODE

CV20-0.3

Type

Opening pressure - code:
0.3 bar - 0.3
4.5 bar - 4.5