




**Hidro
Pnevmo
Tehnika**

3, Vojeli St., Kazanlak, Bulgaria
Tel.: +359 431/ 62 228, 68 440
e-mail: info@hpt-bg.com
www.hpt-bg.com

PILOT OPERATED CHECK VALVES cartridge type

CVP08- 3A

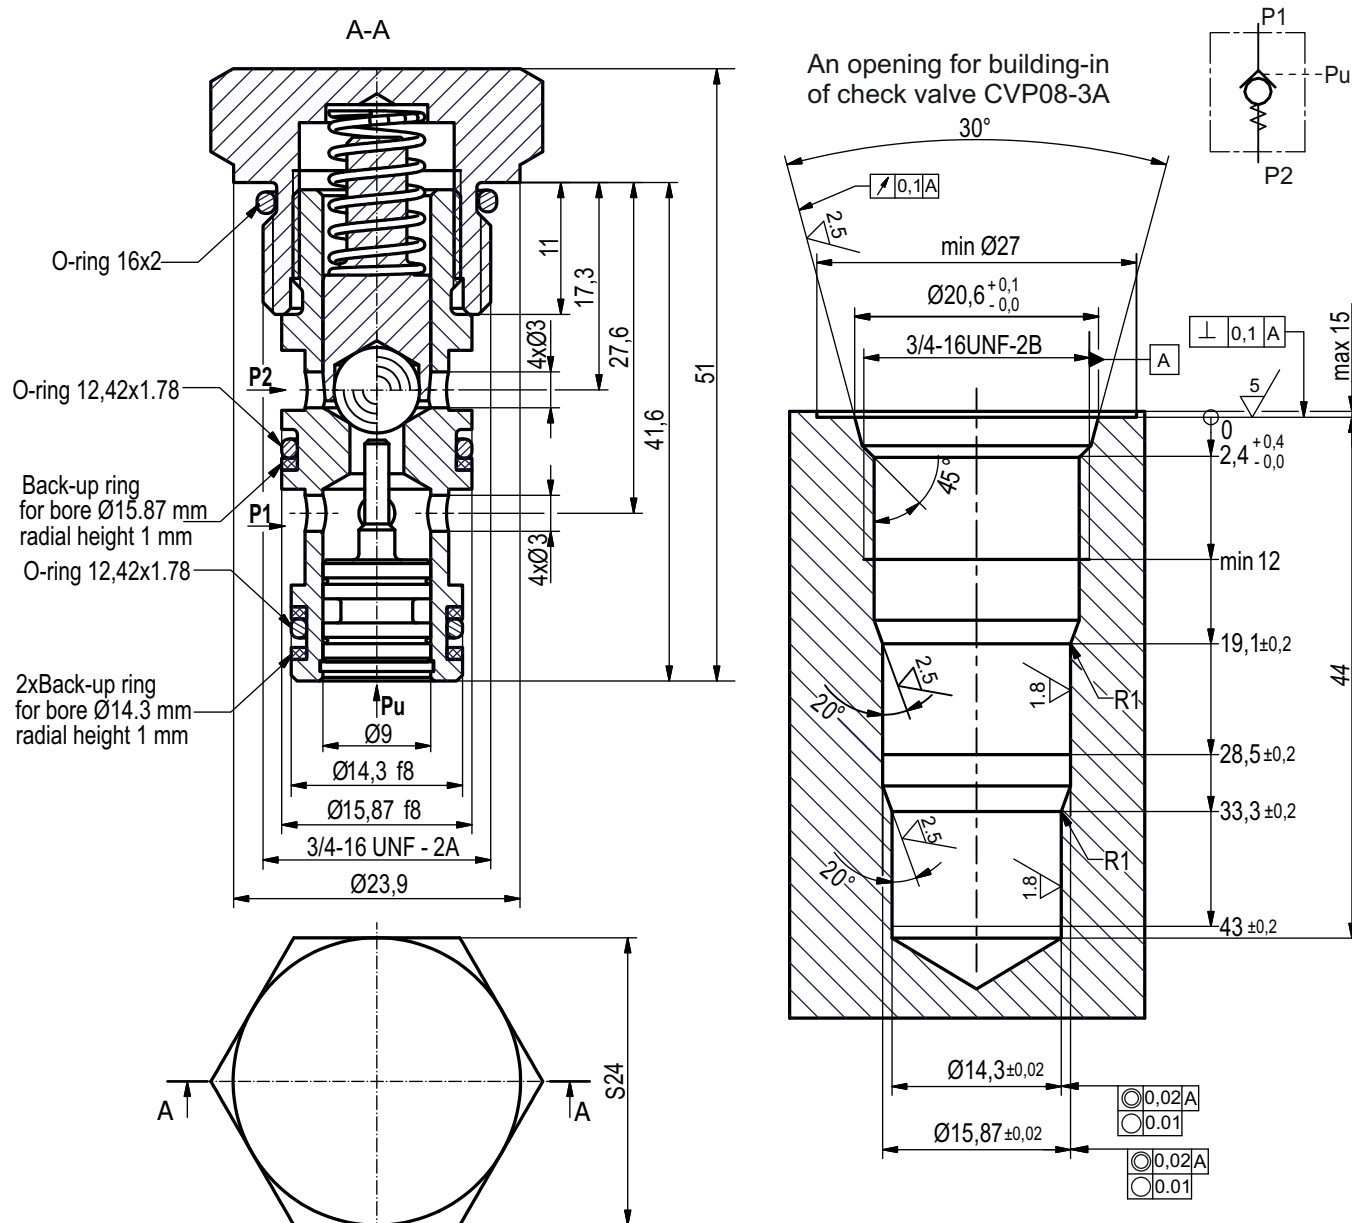

Type	Q _{nom.}	P _{max.}	Pilot ratio	Opening pressure of the check valve	Tightening torque
	L/min	bar	-	bar	Nm
CVP08-3A	10	250	4:1	5	30

All performances and calibration are carried out by using hydraulic oil with viscosity approx. 46 cSt at 50 °C
Temperature range: -20°C...+80°C
Filtration absolute: 63 µm

ORDERING CODE

CVP08-3A

Type