




**Hidro
Pnevmo
Tehnika**


3, Vojeli St., Kazanlak, Bulgaria
Tel.: +359 431/ 62 228, 68 440
e-mail: info@hpt-bg.com
www.hpt-bg.com

PILOT OPERATED CHECK VALVES cartridge type

CVP146-3

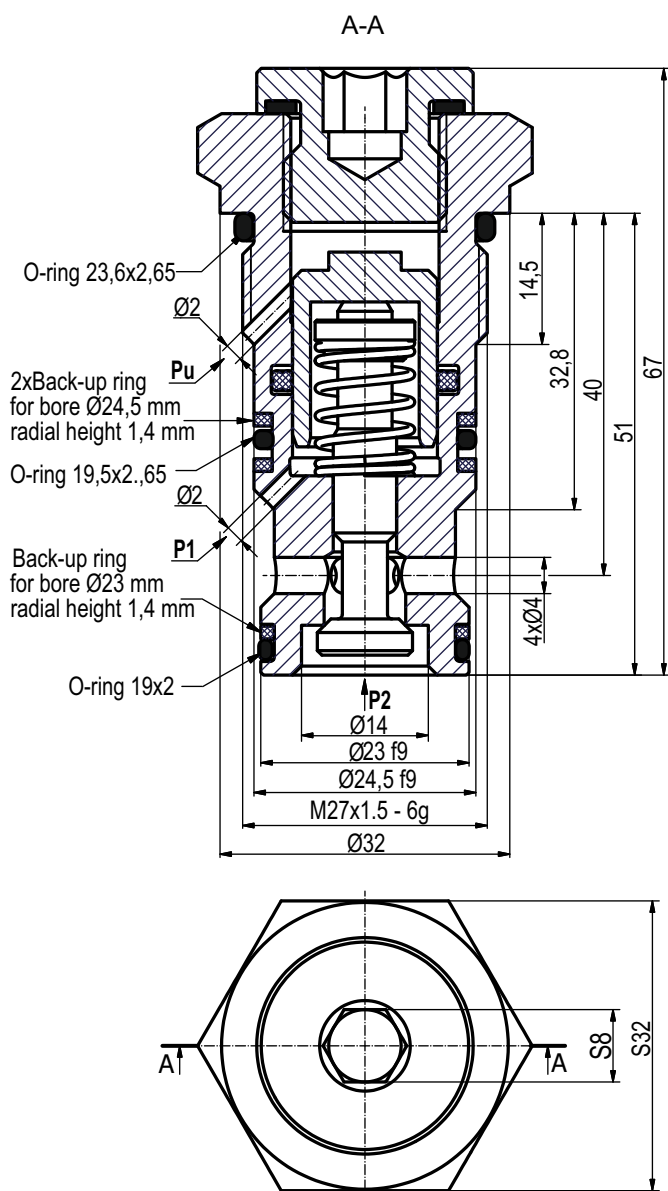

An opening for building-in of check valve CVP146-3

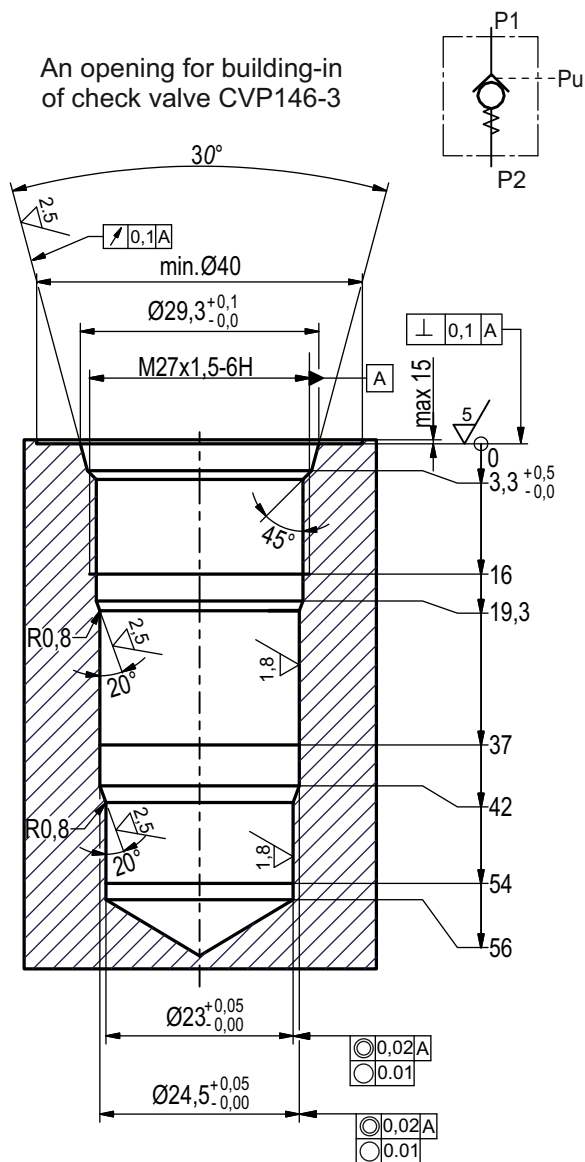

Type	Q _{nom.} L/min	P _{max.} bar	Pilot ratio	Opening pressure of the check valve bar	Tightening torque Nm
CVP146-3	100	350	3,2:1	2	45

All performances and calibration are carried out by using hydraulic oil with viscosity approx. 46 cSt at 50 °C
Temperature range: -20°C...+80°C
Filtration absolute: 63 µm

ORDERING CODE

CVP146-3

Type