







**Hidro
Pnevmo
Tehnika**

3, Vojeli St., Kazanlak, Bulgaria
Tel.: +359 431/ 62 228, 68 440
e-mail : info@hpt-bg.com
www.hpt-bg.com

END OF STROKE VALVES

FC 38 A

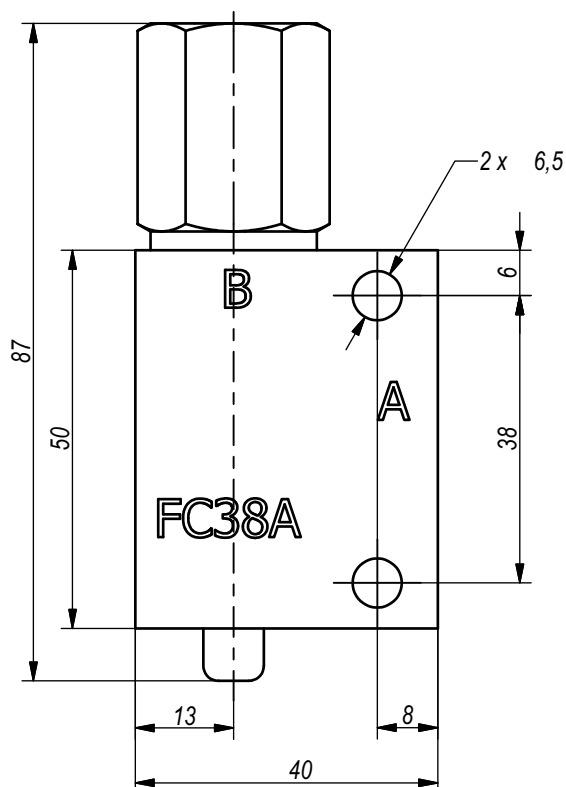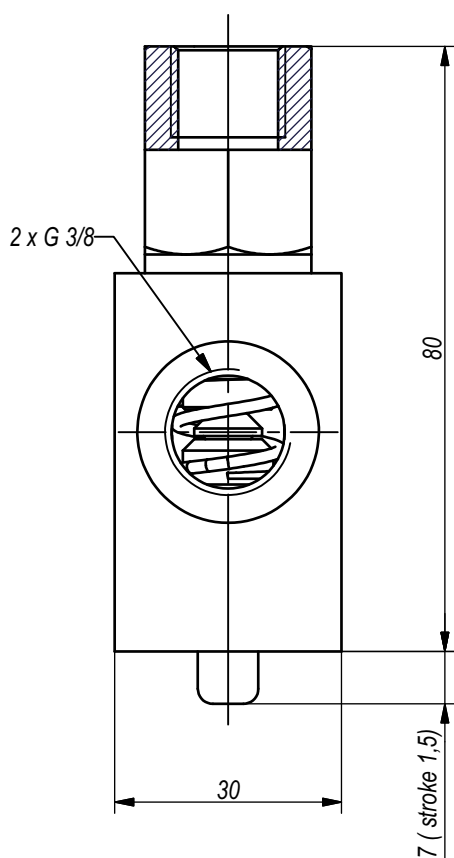

Type	P max. bar.	Q nom. L/min.
FC 38 A	250	10

All performances and calibration are carried out by using hydraulic oil with viscosity approx 46 cSt at 50°C
Temperature range: -20...+80°C
Filtration absolute: 25 μ m

ORDERING CODE

FC 38 A

Type

Port threads "G" - code:
G 3/8" - 38

Modification