





**Hidro
Pnevmo
Tehnika**


3, Vojeli St., Kazanlak, Bulgaria
Tel.: +359 431/ 62 228, 68 440
e-mail : info@hpt-bg.com
www.hpt-bg.com

END OF STROKE VALVES

FC .. NF-

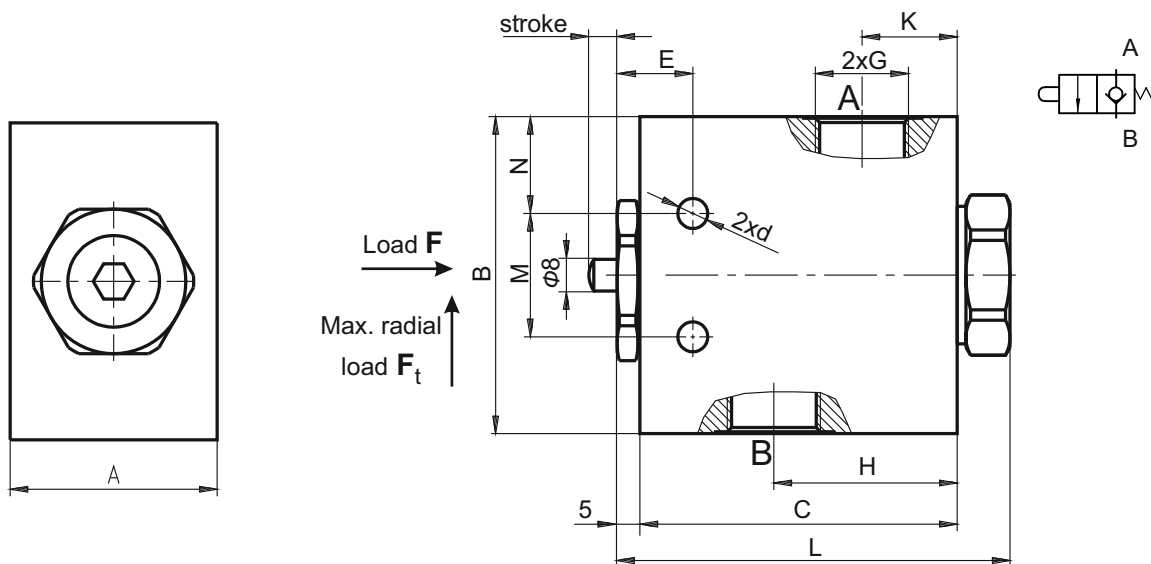

$\Delta P = f(Q)$
46 cst oil at 50 °C

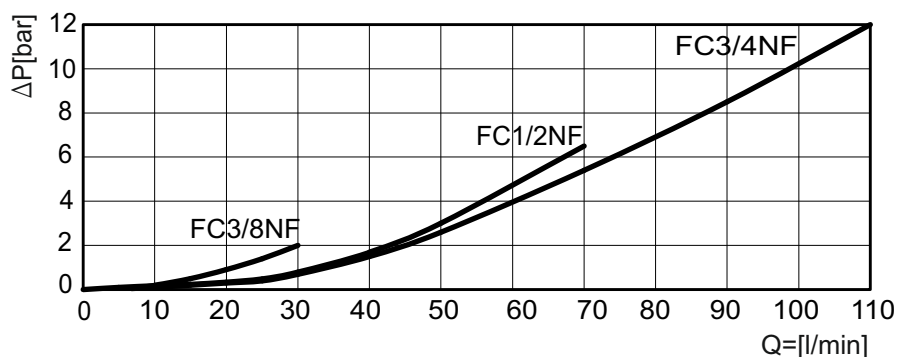

Type	Q _{max.} l/min	P _{max.} bar	max. Load		L mm	A mm	B mm	C mm	M mm	N mm	E mm	K mm	H mm	G	d mm	stroke mm
			F [N]	F _φ [N]												
FC38NF-1	30	350	F=11,5.P/bar/	80	71	30	60	60	35	12,5	15	18	32	G3/8"	8,5	8.5±1
FC12NF-1														G1/2"		8.5±1
FC34NF-2	100		F=15,4.P/bar/	100	105	47	90	85	35	27,5	15	27	52	G3/4"		8±1

All performances and calibration are carried out by using hydraulic oil with viscosity approx. 46 cSt at 50 °C
Temperature range: -20 °C...+80 °C. Filtration absolute: 20 μm

ORDERING CODE

FC 12 NF - .

Series

Type

Port treads "G1" - code:
G3/8" - 38
G1/2" - 12
G3/4" - 34

Modification