






**Hidro
Pnevmo
Tehnika**

3, Vojeli St., Kazanlak, Bulgaria
Tel.: +359 431/ 62 228, 68 440
e-mail : info@hpt-bg.com
www.hpt-bg.com

CHECK VALVES

KO- ..

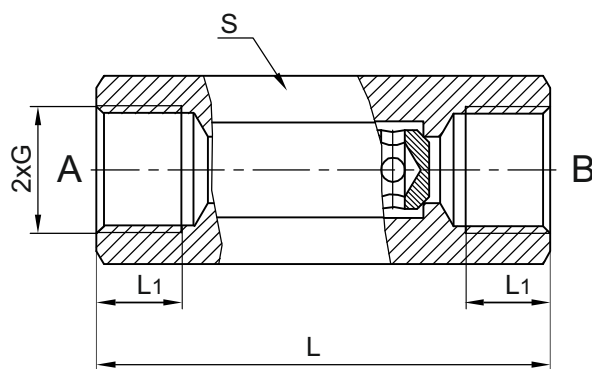

Type	Q_{max}	$P_{max.}$	Opening pressure of the check valve	L	L_1	S	G
	L/min	bar		mm	mm	mm	
KO-14	20	320	0,5	60	12	22	G1/4"
KO-38	20		0,5	65	12	22	G3/8"
KO-12	40		0,5	75	14	27	G1/2"
KO-12/4	40		4	75	14	27	G1/2"
KO-34	100		0,5	83	16	27	G3/4"
KO-112	360		0,5	150	22	60	G1 1/2"
KO-112/4	360		4	150	22	60	G1 1/2"
KO-112/6	360		6	150	22	60	G1 1/2"
KO-112/10	360		10	150	22	60	G1 1/2"

All performances and calibration are carried out by using hydraulic oil with viscosity approx. 46 cSt at 50 °C
Temperature range: -20°C...+80°C
Filtration absolute: 63 µm

ORDERING CODE

KO-14 / ..

Type

Port treads "G1" - code:

G1/4" - 14
G3/8" - 38
G1/2" - 12
G3/4" - 34
G1 1/2" - 112

Opening pressure - code:
0,5 bar - Omit
4 bar - 4
6 bar - 6
10 bar - 10