





**Hidro
Pnevmo
Tehnika**

3, Vojeli St., Kazanlak, Bulgaria
Tel.: +359 431/62 228
e-mail : info@hpt-bg.com
www.hpt-bg.com

HYDRAULIC DRIVEN BOOSTER

ML .../...

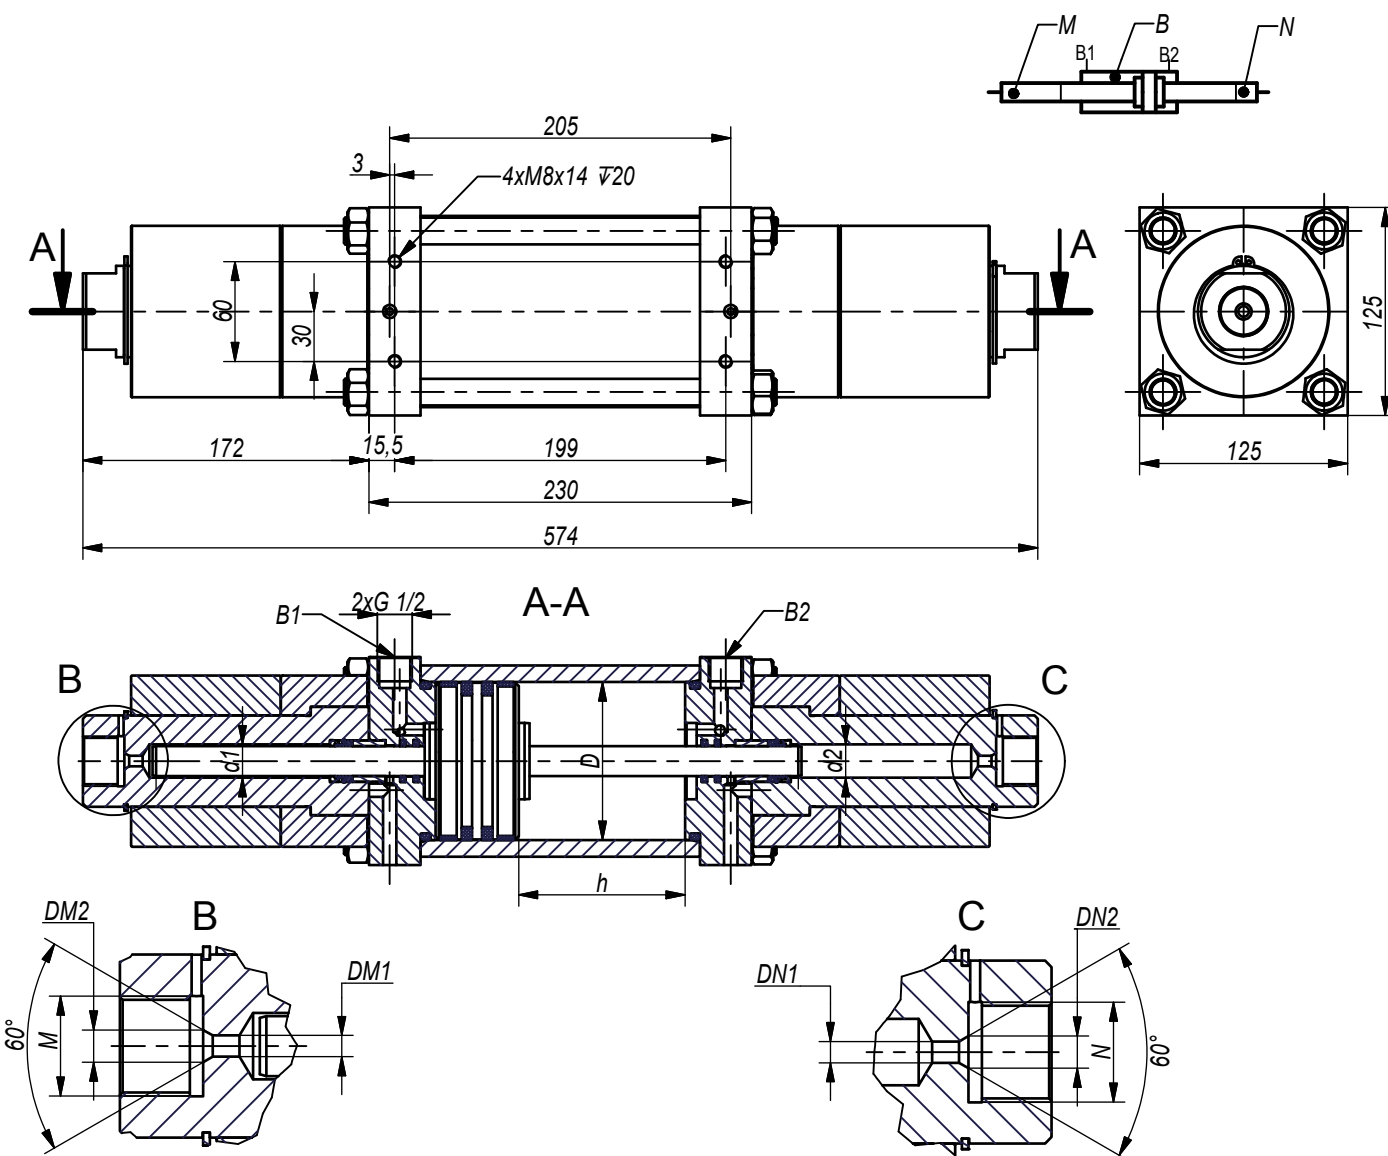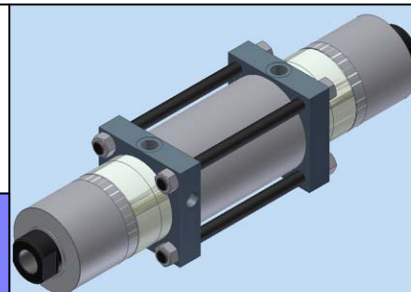

Actuating liquid in chamber "B" - hydraulic oil with a viscosity 20...400 cSt.

Working fluid in chambers "N" and "M" - 5% water and oil emulsion.

Type	Port threads M	Port threads N	D	d1	d2	Stroke of the piston h	Qnom B1, B2	Pmax hB1, B2	Pmax port N	Pmax port M	DM1	DM2	DN1	DN2
	-	-	[mm]	[mm]	[mm]	[mm]	[l/min]	[bar]	[bar]	[bar]	[mm]	[mm]	[mm]	[mm]
ML 118U/118U	1 1/8-12 UNF	1 1/8-12 UNF	95	20	20	100	25	210	5000	5000	6,4	11,1	6,4	11,1
ML 020/020	M20x1,5	M20x1,5	95	20	20	100	25	110	3000	3000	3,2	6,6	3,2	6,6

ORDERING CODE

ML 118U / 118U

Type	Port threads "M" - code: 1 1/8-12 UNF - 118U M20x1,5 - 020	Port threads "N" - code: 1 1/8-12 UNF - 118U M20x1,5 - 020
------	--	--