

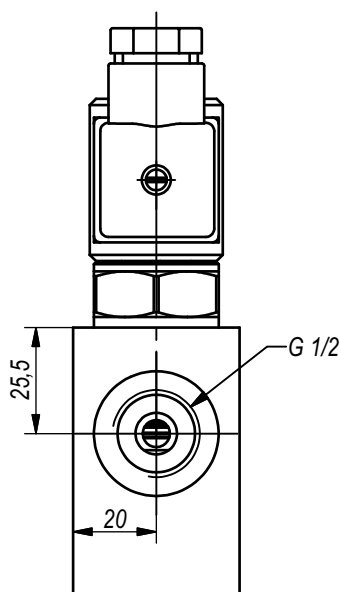
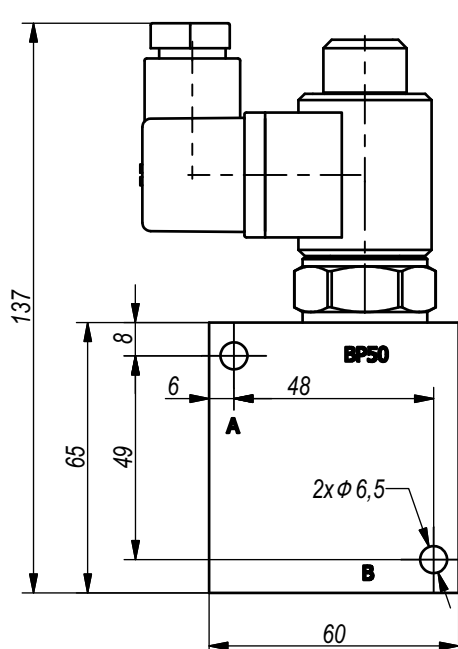




BP50/SV13.. - ..

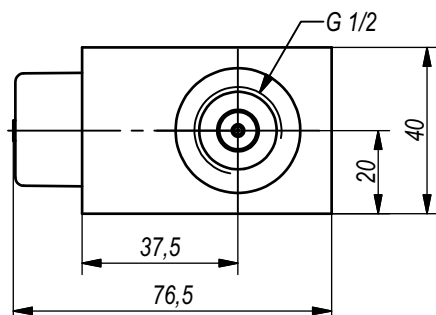

General		
Ambient temperature	°C	-20...+50
Hydraulic		
Nominal pressure	bar	200
Nominal flow rate	L/min	50
Working fluid – mineral oil		
- viscosity	mm ² /s	10...100
- filtration level	μm	25 or better
- temperature	°C	-20...80
Power supply		
Voltage of operating solenoid	V DC	12 24
	V AC	110/50Hz 220/50Hz

1. All performances and calibration are carried out by using hydraulic oil with viscosity approx 46 cSt at 50°C.
2. Tightening torque for solenoid valve - 35 N.m.

BP50/ SV13B1 - ..

Solenoid valve - code:
normally open-**SV13A1**
normally closed-**SV13B1**

Operating voltage - code:

12V / 00Hz	- 12
24V / 00Hz	- 24
110V/50Hz	- 110
220V/50Hz	- 220