





**Hidro
Pnevmo
Tehnika**

3, Vojeli St., Kazanlak, Bulgaria
Tel.: +359 431/ 62 228, 68 440
e-mail: info@hpt-bg.com
www.hpt-bg.com

SOLENOID VALVES

SV13...-

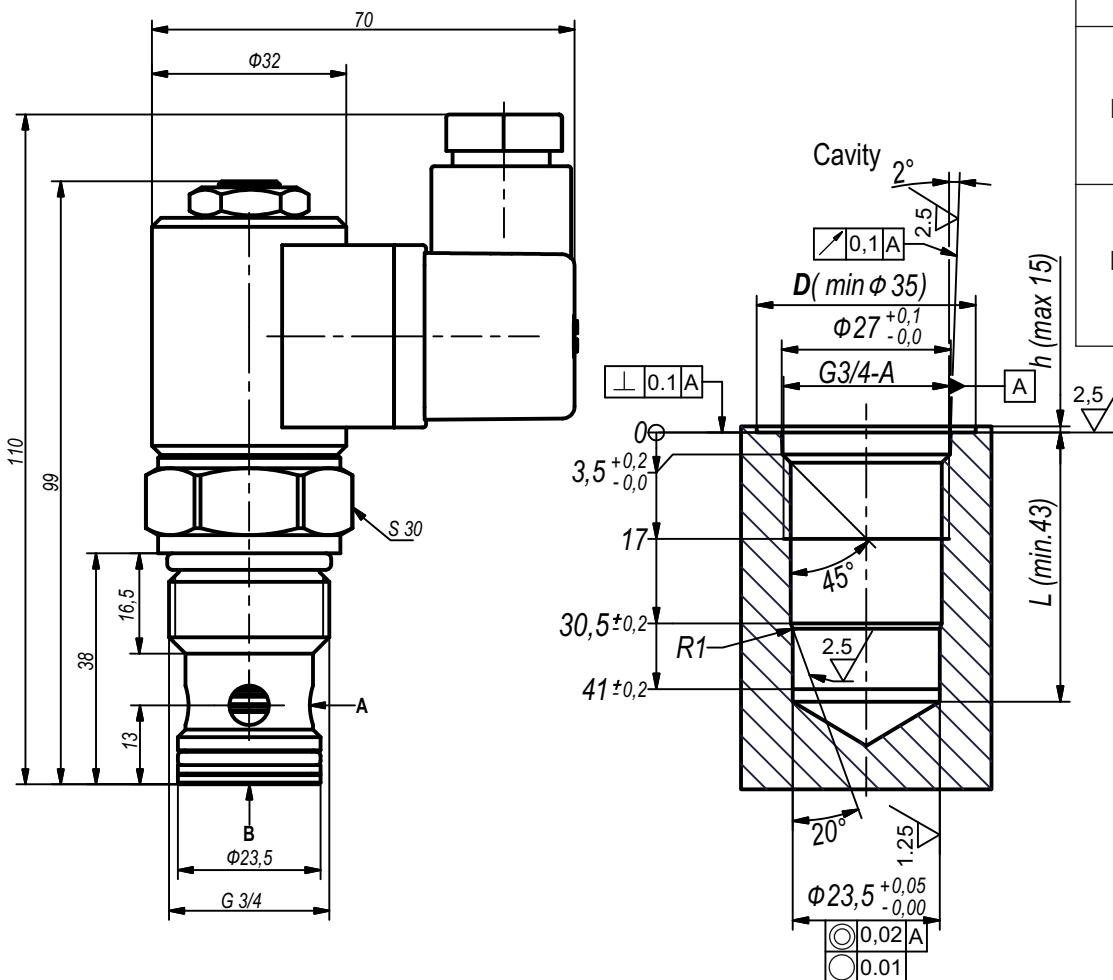

Code	Hydraulic scheme
A	 normally open
B	 normally closed
E	 normally open with reverse flow
F	 normally closed with reverse flow

TECHNICAL DATA		
	Measurement unit	Value
Maximum pressure	bar	250
Nominal flow	L/min	60

All performances and calibration are carried out by using hydraulic oil with viscosity approx 46 cSt at 50 °C.
Temperature range: -20...+80 °C
Filtration absolute: 25 µm

ORDERING CODE

SV13 B 1 - 12

Type

Hydraulic scheme - code
normally open - **A**
normally closed - **B**
normally open with reverse flow - **E**
normally closed with reverse flow - **F**

Version

Operating voltage - code
12V / 00Hz - **12**
24V / 00Hz - **24**
110V/50Hz - **110**
220V/50Hz - **220**