





**Hidro
Pnevmo
Tehnika**

3, Vojeli St., Kazanlak, Bulgaria
Tel.: +359 431/ 62 228, 68 440
e-mail: info@hpt-bg.com
www.hpt-bg.com

SOLENOID VALVES

SV15...-

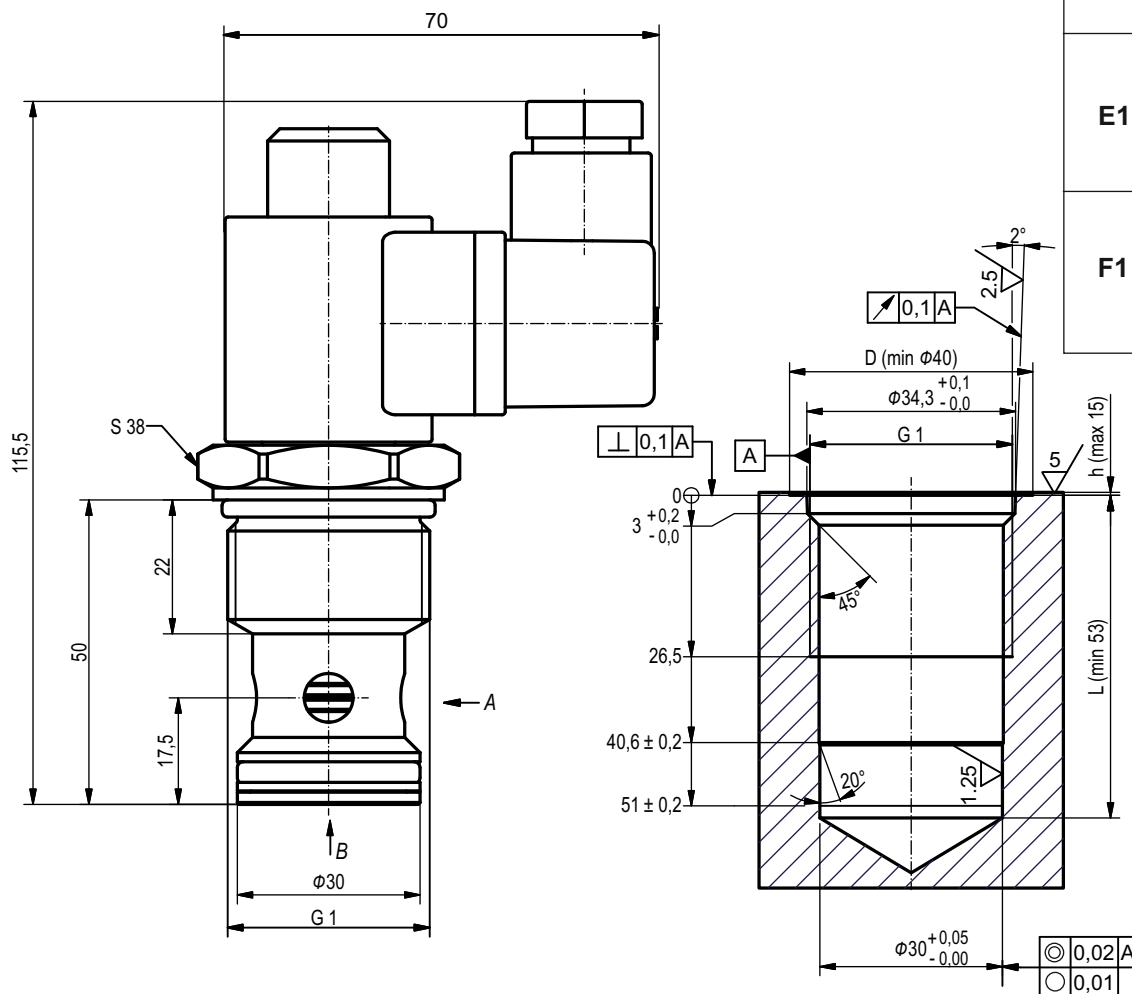

Code	Hydraulic scheme
A1	 normally open
B1	 normally closed
E1	 normally open with reverse flow
F1	 normally closed with reverse flow

TECHNICAL DATA		
	Measurement unit	Value
Maximum pressure	bar	250
Nominal flow	L/min	120

All performances and calibration are carried out by using hydraulic oil with viscosity approx 46 cSt at 50 °C.
Temperature range: -20...+80 °C
Filtration absolute: 25 µm

ORDERING CODE

SV15 B 1 - 12

Type

Hydraulic scheme - code
normally open - **A**
normally closed - **B**
normally open - **E**
normally closed - **F**

Version

Operating voltage - code
12V / 00Hz - **12**
24V / 00Hz - **24**
110V/50Hz - **110**
220V/50Hz - **220**